

# Technical Manual

## RS4/B Reference Standard Series 3-Way



### ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance 4 to 8 ohms
- Power Rating 40 – 150 watts RMS
- Crossover Frequency 600, 4000Hz
- Frequency Response RS4: 40Hz – 32kHz ( $\pm 3$ dB)  
RS4B: 38Hz – 32kHz ( $\pm 3$ dB)


### PRODUCTION HISTORY:

- RS4 Introduced in 1983  
RS4B Introduced in 1984
- RS4 Discontinued in 1984  
RS4B Discontinued in 1986
- Original Retail Price: \$897.00/pair

### PHYSICAL SPECIFICATIONS:


- 1x - EMIT™ Tweeter
- 1x - PolyDome Midrange
- 2x - 8" (203.2mm) Woofers with Polypropylene Cones
- Dimensions (H x W x D) RS4: 33" x 13-1/2" x 10"  
(838.2mm x 342.9mm x 254mm)  
RS4B: 42" x 14-1/2" x 10-7/8"  
(1066mm x 368mm x 276mm)
- Cabinet Not Sold
- Grille NLA
- Control Tweeter #145-0103
- Control Midrange #145-0110
- Crossover NLA
- Logo #716-0347

### TECHNICAL INFORMATION




TWEETER  
#902-5023 NLA

TWEETER DIAPHRAGM  
#751-3722 COMP




POLYDOME MIDRANGE  
#902-3186C NLA

MID DIAPHRAGM  
#751-2417

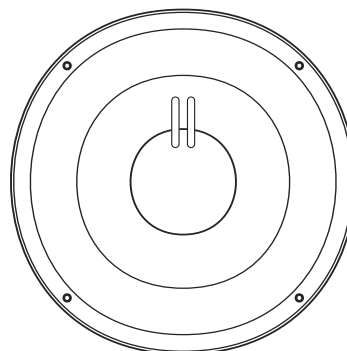

8" WOOFER  
#902-4976 NLA  
#902-5030 NLA

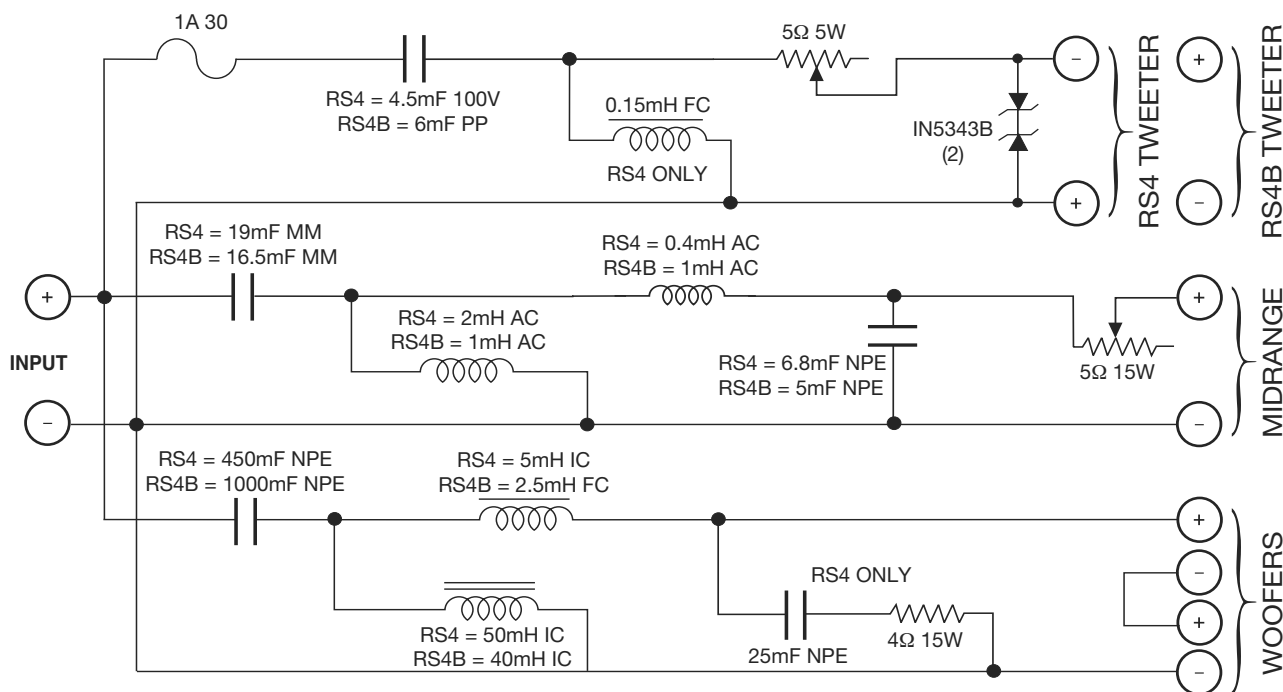

RS4/B Reference Standard Series 3-Way